# GENERATION LIGHTING Chandelier

### **GENERAL PRODUCT INFORMATION:**

These fixtures are intended to be installed utilizing NEC compliant junction

This product is safety listed for damp locations.


This instruction shows a typical installation.

#### **CAUTION - RISK OF FIRE**

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.


## **SAVE THESE INSTRUCTIONS!**

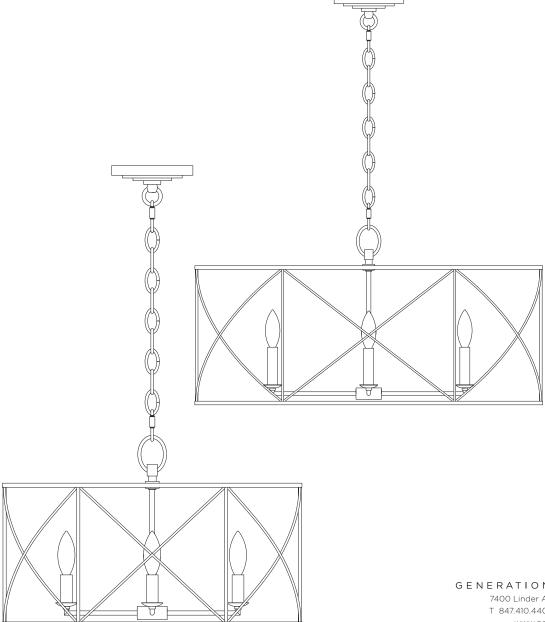

GENERATION LIGHTING

7400 Linder Ave., Skokie, IL 60077 T 847.410.4400 | F 847.410.4500 www.generationlighting.com

### Install the Fixture

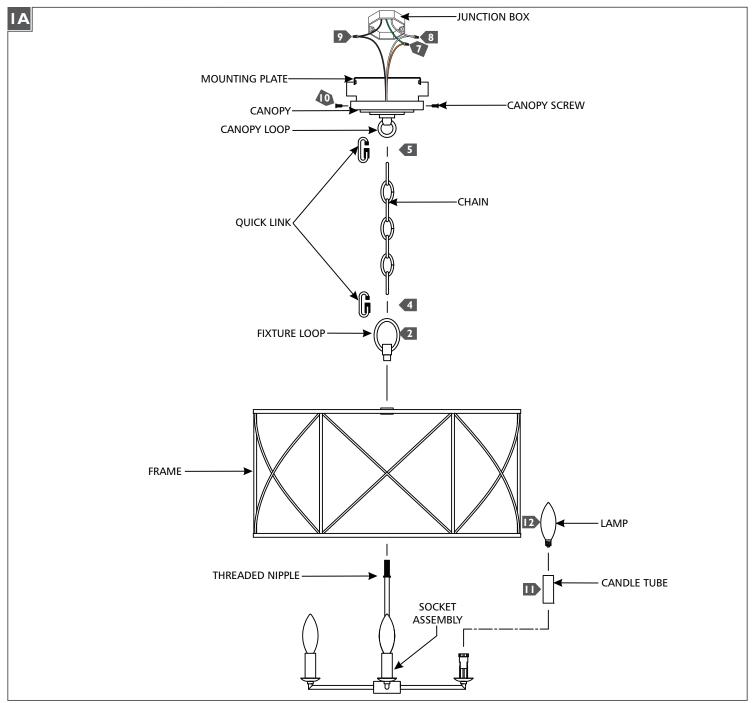

- Secure the mounting plate to the junction box.
- 2 Feed the fixture wires through frame, and fixture loop, then secure them together by screwing the fixture loop onto the threaded nipple.
- 3 Determine the wanted height of the fixture and remove a portion of the chain from the bottom by opening a link with pliers.
- 4 Install a quick link to bottom end of the chain, then secure the link onto the fixture loop.
- Install a quick link onto the remaining end of the chain, then secure the quick link onto the canopy loop.
- Weave the cord through the chain, canopy loop, and canopy, and out of the junction box. Trim the cord leaving enough to make electrical connections.
- 7 Connect the fixture to a suitable ground in accordance to local electrical codes.
- 8 Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 9 Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- Neatly place all the wires into the junction box, place the canopy onto the mounting plate, and secure it in place with the provided canopy screws.
- III Install the candle tubes by sliding one over each socket.
- Screw the lamps into the sockets. Refer to the label on the lamp socket for Max Wattage Information.