# **Geneva Flush Mount**

GENERATION LIGHTING CEILING

### **GENERAL PRODUCT INFORMATION:**

These fixtures are intended to be installed utilizing NEC compliant junction boxes.


This product is safety listed for damp locations.

This instruction shows a typical installation.

#### **CAUTION - RISK OF FIRE**

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved. <u>Use mi</u>nimum 90°c supply conductors.


### SAVE THESE INSTRUCTIONS!

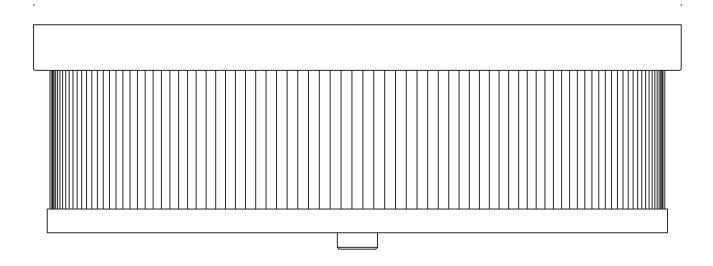

GENERATION LIGHTING 7400 Linder Ave., Skokie, IL 60077 T 847.410.4400 | F 847.410.4500 www.generationlighting.com

CF1052 1.0

## Install the Fixture

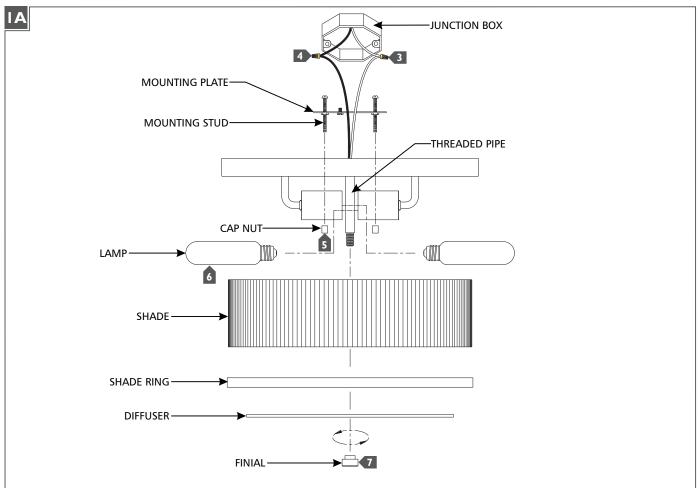

- **I** Secure the mounting plate to the junction box.
- 2 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 3 Connect the white fixture wire to the neutral power line wire with a wire nut.
- Connect the black fixture wire to the hot power line wire with a wire nut.
- 5 Neatly tuck the wiring into the junction box, place the fixture base onto the mounting studs, and secure it in place by screwing the cap nuts onto the studs.
- **6** Screw the lamps into the sockets. Refer to the label on the socket for max wattage information.
- Place the shade, shade ring, and diffuser onto the threaded pipe, then secure them in place by screwing the finial onto the pipe.